

# PCA<sup>®</sup> Spray Faucet Attachment - 0.5 gpm max Pressure Compensating Regular Size



- Features and Benefits**
- ▶ Pressure compensating for constant flow from 20 to 80 psi.
  - ▶ Provides non-splashing, non-aerated spray.
  - ▶ Anti-clogging dome screen filters sediment and particles.
  - ▶ Color-coded to identify flow rate.
  - ▶ Virtually unbreakable single piece insert ensures a longer useable life.
  - ▶ Also compatible with regular and vandal proof M22 and M24 metric housings.
  - ▶ Available housing finishes: unplated, chrome and PVD.
  - ▶ Laser marked housings: statutory mark and custom logo.
  - ▶ Rubber washer.

**Certification**

ANSI/NSF 61  
ASME A112.18.1M and CSA B125

**Part Number & Packing**



Designation	Part #	Packing
Insert only	A5.9042.1	3000
Regular male 15/16"-27	40.7059.613	500
Regular female 55/64"-27	40.7059.623	500
Regular dual thread 15/16"-27 55/64"-27	40.7059.673	500
Vandal proof regular male 15/16"-27	40.7059.723	400
Vandal proof regular female 55/64"-27	40.7059.733	400
Vandal proof dual thread	40.7059.763	400
Vandal key	BX.399C.1	

\*Other combinations also available

**Color Code**

Dome: White	Diffuser: Lime Green	Basket: Dark Gray
-------------	----------------------	-------------------


**Flow Rate Curve**

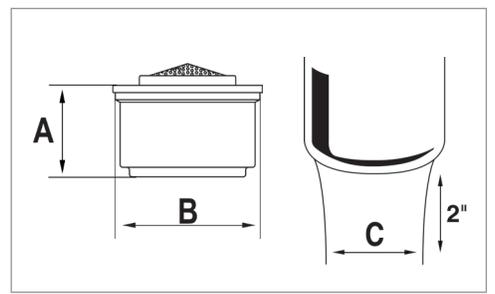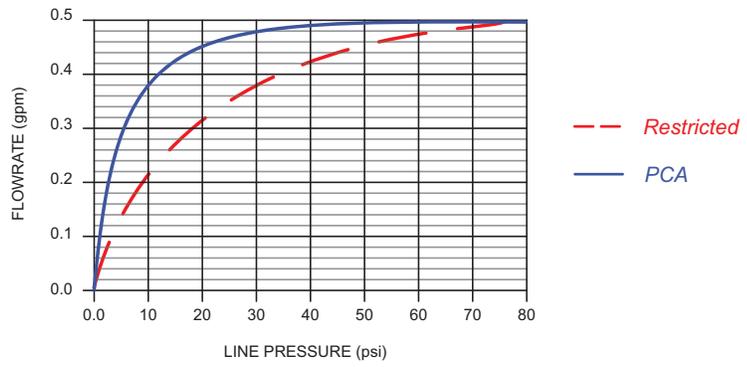

**Dimensions**

No	mm	In
A	13.00	.512
B	19.95	.785
C	≈ 25	≈ 1

**Housings**

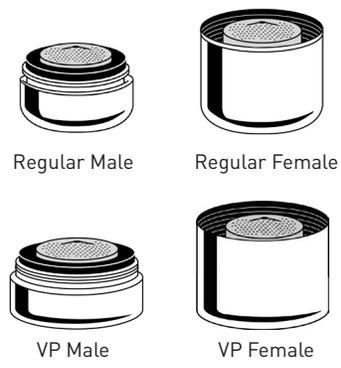

**Technical Data**

Materials:	Body	Acetal
	O-ring	EPDM
	Washer	EPDM
Working temperature:	150°F	
Working pressure:	125 psi	
Wetted surface area:	2831.3 mm <sup>2</sup>	