

Perlator®

Faucet Aerator - 1.0 gpm max

Flow Restricted Regular Size



Features and Benefits

- ▶ Watercolours® design: color coding to identify flow rate and stream pattern (U.S. patent pending).
- ▶ Integrated anti-liming Honeycomb® replaces conventional wire mesh screens prone to lime build up.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ Patented construction provides a splash-free stream, well aerated and soft to the touch.
- ▶ Also compatible with regular and vandal proof M22 and M24 metric housings.
- ▶ Available housing finishes: unplated, chrome and PVD.
- ▶ Laser marked housings: custom logo.
- ▶ Rubber washer.

Certification

ANSI/NSF 61
ASME A112.18.1M and CSA B125

Part Number & Packing



Designation	Part #	Packing
Insert only	40.3031.000	1000
Regular male 15/16"-27	40.3031.613	500
Regular female 55/64"-27	40.3031.623	500
Regular dual thread 15/16"-27 / 55/64"-27	40.3031.673	500
Vandal proof regular male 15/16"-27	40.3031.723	400
Vandal proof regular female 55/64"-27	40.3031.733	400
Vandal proof dual thread	40.3031.763	400
Regular vandal key	BX.399C.1	

*Other combinations also available

Color Code

Dome: Ivory	Diffuser: White	Basket: Dark Gray
-------------	-----------------	-------------------


Flow Rate Curve

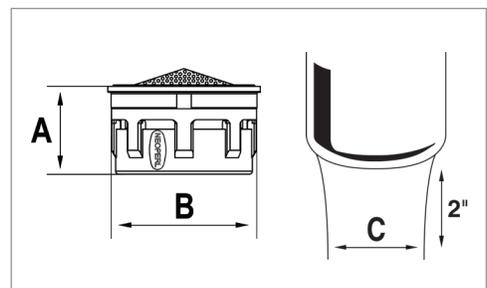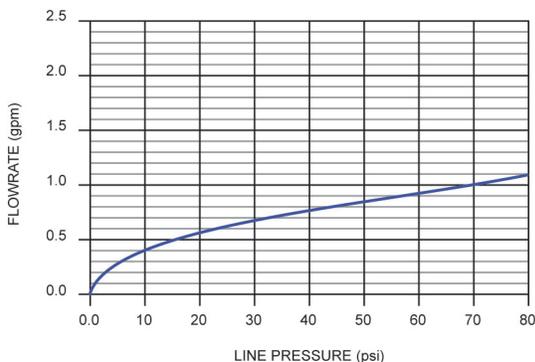

Dimensions

No	mm	In
A	12.00	.472
B	19.97	.786
C	≈ 13	≈ 1/2

Housings

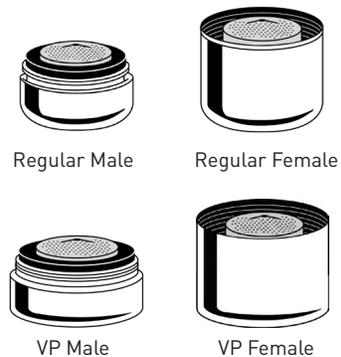

Technical Data

Materials:	Body	Acetal
	Washer	EPDM
Working temperature:	150°F	
Working pressure:	125 psi	
Wetted surface area:	3108.17 mm ²	