


LEDone

Projects:
Comments:

Stadium Flood Light 200W Spec

SPECIFICATIONS:

WATTAGE:	200W
DLC WATTAGE:	210W
MODEL #:	LOD-SFL-200W
MANUFACTURER:	Shenzhen Mecerree Photoelectric Technology Co., Ltd.
DLC #:	GL-FL-200W
CERTIFICATION:	CE \ RoHS \ FCC \ DLC \ ETL
INPUT VOLTAGE:	90-305 VAC
AC CURRENT(TYP.)	4A/115VAC, 2A/230VAC 1.2A/277VAC
POWER FACTOR:	0.9
FREQUENCY:	50-60Hz
LUMENS:	26,640.9LM
LUMENS EFFICACY:	122.3LM/W
KELVIN (CCT):	3000/4000/5000/6500K
THD:	<9%
CRI:	Ra80-93
IP RATING:	IP67
BEAM ANGLE (DEGREE):	10°/24°/38°/60°/90°
MATERIALS:	AL+GLASS
DRIVER:	MeanWell
LED LIGHT SOURCE	Cree
LIFE SPAN (HOURS):	>50000H
DIMMING COMPATIBLE:	0-10V
LENGTH OF WARRANTY (YEARS):	5Years
WORKING ENVIRONMENT:	-40°C ~ +65°C
POWER EFFICIENCY:	>90%
SIZE:	520*350*104 MM
WEIGHT:	9 KG
PERCENTAGE OF WATTAGE SAVED:	45 - 50%

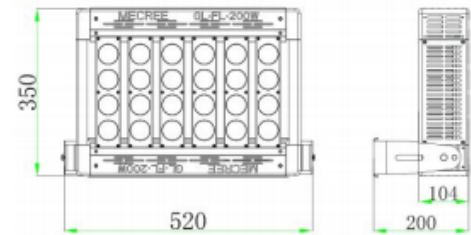

Features:

System Light Efficacy 100 LPW. Flexible, Modular Design. Multiple Choice of Optical Lenses. Easy Installation & Maintenance. ETL, DLC, CE, RoHS, CB, and WEEE certified.

Applications:

General flood lighting, corridor lighting, security lighting, and roof top lighting. Can also be used as a high bay.

